


Aves HP 5W-40

Performance Claims

SAE 5W-40
API SN/CF
ACEA C3

VW 511.00, MB 229.51, MB 229.52, PORSCHE C40, BMW
Longlife-04, GM dexos 2

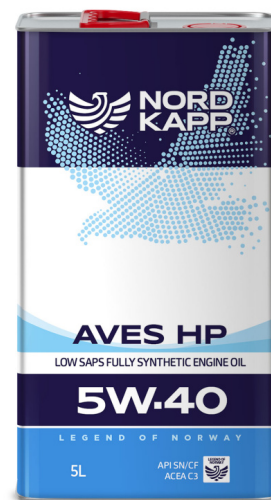

Description

NORDKAPP AVES HP SAE 5W-40 is a modern fully synthetic multigrade engine with an exceptional quality of high-viscosity stability. Improves engine protection, performance, cleanliness and extends oil drain intervals. Low SAP formulation protects the engine and catalytic system. This engine oil is also suitable for passenger car diesel engines with pump/nozzle injection system (PD).

Advantages

- Excellent engine cleanliness and performance
- Reduces fuel consumption
- Extended oil drain intervals (Longlife) DPF and ERG system long life due to low-ash formula
- Highest performance over the full temperature range

Typical characteristics

PROPERTIES	METHOD	UNITS	TYPICAL INDICATORS
Density at 20°C	ASTM D1298	kg/m ³	900
Viscosity at -30°C	ASTM D5293	cP	6600
Viscosity at 100°C	ASTM D445	cSt	14,4
Viscosity index, no less than	ASTM D2270		140
Flash point COC, no less than	ASTM D92	°C	200
Pour point	ASTM D97	°C	-38
TBN	ASTM D4739	mgKOH/g	5,0
Sulphate ashes, no more than	ASTM D874	%	1,0

Packaging

VOLUME	ART №
5 L (Tin can)	0211

TOR LUBRICANTS NORWAY
Fjordalléen 16, 0250 Oslo, Norway
Phone: +47 852 90054
E-mail: info@nordkapp-oil.com

Information in this data sheet believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is given as a guide only. It is the responsibility of the user to evaluate and use products safely. No responsibility is taken for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. You should consult our local representative if you require any further information.